

EROSION CONTROL & GRADING NOTES

- 1) EXPOSE AS SMALL AN AREA OF SOIL AS POSSIBLE ON THE SITE FOR NO MORE THAN 15 DAYS. KEEP MUST WITH TOLERABLE LIMITS BY SPRINKLING OR OTHER ACCEPTABLE MEANS.
- 2) ALL CUT/FILL AREAS TO HAVE A MINIMUM OF 7" OF TOPSOIL COVER. AREAS DRESSED WITH TOPSOIL SHALL RECEIVE 12 POUNDS PER 1000 SQUARE FEET OF 8-12-12 FERTILIZER (UNLESS OTHERWISE SPECIFIED) IN WRITTEN SPECIFICATIONS. 5 POUNDS OF METRILUCK 31 FESCUE SEED PER 1000 SQUARE FEET, AND A STRAW MULCH COVER OF 70% 80% COVERAGE (APPROXIMATELY 125 POUNDS PER 1000 SQUARE FEET), UNLESS OTHERWISE NOTED WITHIN WRITTEN SPECIFICATIONS.
- 3) EROSION CONTROL BARRIERS IS CALLED OUT ON PLANS AND IS TO COMPLY WITH THE METROPOLITAN STORMWATER MANAGEMENT MANUAL, VOLUME FOUR, SECTION TCP-14.
- 4) DISTURBED AREAS ARE TO BE GRADED TO DRAIN AS INDICATED IN THE PLAN TO SEGMENT BARRIERS DURING AND UPON THE COMPLETION OF CONSTRUCTION.
- 5) THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE VERIFICATION AND THE LOCATION OF ANY EXISTING UTILITIES. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO AVOID DAMAGE TO ALL EXISTING UTILITIES DURING CONSTRUCTION. IF DAMAGE DOES OCCUR TO ANY SUCH INSTALLATION, FULL REPAIR WILL BE ACCOMPLISHED AS PER THE CURRENT SPECIFICATION GOVERNING SUCH WORK.
- 6) ANY ACCESS ROUTES TO THE SITE SHALL BE BASED WITH CRUSHED STONE, ASTM #1 STONE, 100 FEET LONG AND AT LEAST 6" THICK.
- 7) THE PLACING AND SPREADING OF ANY FILL MATERIAL IS TO BE STARTED AT THE LOWEST POINT AND PROCEED UP IN HORIZONTAL LAYERS OF 8" THICKNESS (OR AS DIRECTED BY THE SOILS INVESTIGATIVE REPORT). SAID FILL MATERIAL IS TO BE FREE OF ROCK, ROOTS, FROZER DECOMPOSABLE MATERIAL, AND REPORT ANY DISCREPANCIES TO THE ENGINEER IMMEDIATELY FOR A DECISION.
- 8) THE CONTRACTOR SHALL NOTIFY THE METRO DAVIDSON COUNTY DEPARTMENT OF PUBLIC WORKS CONSTRUCTION COMPLIANCE DIVISION, THREE DAYS PRIOR TO BEGINNING THE WORK.
- 9) THE CONTRACTOR SHALL LOCATE AND STAKE THE LAYOUT OF THE SITE IN THE FIELD FOR INSPECTION BY THE ENGINEER. THE CONTRACTOR SHALL CHECK THE GRADES AND FINAL DIMENSIONS ON THE DRAINAGE, AND REPORT ANY DISCREPANCIES TO THE ENGINEER IMMEDIATELY FOR A DECISION.
- 10) SURPLUS EXCAVATION OF TOPSOIL SHALL BE PLACED ON THE SITE AS APPROVED BY THE OWNER FOR THE PURPOSE OF FUTURE LANDSCAPE USE.
- 11) THE CONTRACTOR SHALL FURNISH AND INSTALL ALL NECESSARY TEMPORARY WORKS FOR THE PROTECTION OF THE PUBLIC AND EMPLOYEES, INCLUDING WARNING SIGNS AND LIGHTS.
- 12) THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY DAMAGE DONE TO THE PREMISES OR ADJACENT PREMISES OR INJURIES TO THE PUBLIC DURING THE CONSTRUCTION CAUSED BY HIMSELF, HIS SUB-CONTRACTORS, OR THE CARELESSNESS OF ANY OF HIS EMPLOYEES.
- 13) ALL WORK IS TO BE COMPLETED WITH COMPLIANCE TO THE RULES AND REGULATIONS SET FORTH BY METRO WATER SERVICES. THE CONTRACTOR SHALL GIVE ALL NECESSARY NOTICE, OBTAIN ALL PERMITS, AND PAY FEES REQUIRED FOR THE COMPLETION OF HIS PORTION OF THE WORK. HE SHALL ALSO COMPLY WITH ALL CITY, COUNTY AND STATE LAWS AND ORDINANCES OR REGULATIONS RELATING TO PORTIONS OF WORK WHICH HE IS TO PERFORM.
- 14) ALL EROSION CONTROL MEASURES SHALL REMAIN IN PLACE UNTIL SITE IS STABILIZED & CONSTRUCTION IS COMPLETE.
- 15) CONTRACTOR SHALL PROVIDE AN AREA FOR CONCRETE WASH DOWN AND EQUIPMENT FUELING IN ACCORDANCE WITH METRO CR-10 & CR-13. LOCATION TO BE COORDINATED WITH THE NPDES DEPARTMENT DURING THE PRE-CONSTRUCTION MEETING.

PUBLIC WORKS NOTES

- 1) ALL WORK WITHIN THE PUBLIC RIGHT OF WAY REQUIRES AN EXCAVATION PERMIT FROM THE DEPARTMENT OF PUBLIC WORKS.
- 2) PROOF-ROLLING OF ALL STREET SUBGRADES IS REQUIRED IN THE PRESENCE OF THE PUBLIC WORKS INSPECTOR. INSPECTION OF THE BINDER COURSE IS REQUIRED PRIOR TO FINAL PAVING IN THE PRESENCE OF THE PUBLIC WORKS INSPECTOR. THESE REQUESTS ARE TO BE MADE 24 HOURS IN ADVANCE.
- 3) STOP SIGNS ARE TO BE 30 INCH BY 30 INCH.
- 4) STREET SIGNS TO HAVE SIX INCH WHITE LETTERS ON A NINE INCH GREEN ALUMINUM BLADE, HIGH INTENSITY REFLECTIVE.
- 5) ALL PavEMENT MARKING ARE TO BE THERMOPLASTIC.

ADJACENT FIRE HYDRANT RESULTS

EXISTING FIRE HYDRANTS TAG BOLT NUMBERS 154 & 155 (BOTH LOCATED ALONG 6TH AVENUE NORTH) WERE FLOW TESTED BY METRO WATER SERVICES ON OCTOBER 4, 2013 BELOW IS A SUMMARY OF THE FLOW RESULTS:

STATIC PRESSURE:	92 PSI
RESIDUAL PRESSURE:	76 PSI
FLOW @ 30 PSI =	1,443 GPM
	1,863 GPM

BASED ON TABLE H.5.1 OF THE CURRENT NFPA, THE PROPOSED STRUCTURE WOULD NOT BE REQUIRED TO BE EQUIPPED WITH A SPRINKLER SYSTEM.

WATER & SEWER NOTES

- 1) ALL WATER AND SEWER CONSTRUCTION SHALL BE IN ACCORDANCE WITH SPECIFICATIONS AND STANDARD DETAILS OF THE METRO WATER SERVICES.
- 2) THE CONTRACTOR IS RESPONSIBLE FOR REIMBURSING THE METRO WATER SERVICES THE COST OF INSPECTION.
- 3) THE CONTRACTOR IS TO PROVIDE AND MAINTAIN THE CONSTRUCTION IDENTIFICATION SIGN FOR PRIVATE DEVELOPMENT APPROVED.
- 4) ALL CONNECTIONS TO EXISTING MANHOLES SHALL BE BY CORING AND RESILIENT CONNECTOR METHOD.
- 5) REDUCED PRESSURE BACKFLOW PREVENTION DEVICES (RPBD) OR DUAL CHECK VALVES WILL BE REQUIRED ON ALL TEST AND FILL LINES (AMPIER) NEEDED FOR WATER MAIN CONSTRUCTION AND MUST BE APPROVED BY THE METRO WATER SERVICES.
- 6) ALL WATER METERS SHALL BE A MINIMUM OF 24" NOT TO EXCEED A MAXIMUM OF 28" BELOW FINISHED GRADE.
- 7) PRESSURE REGULATING DEVICES WILL BE REQUIRED ON THE CUSTOMER SIDE OF THE METER WHEN PRESSURES EXCEED 150 PSI.
- 8) PRESSURE REGULATING DEVICES WILL BE REQUIRED ON THE STREET SIDE OF THE METER WHEN PRESSURES EXCEED 150 PSI.

LANDSCAPE NOTES

- 1) THE LANDSCAPE CONTRACTOR SHALL COORDINATE ALL CONSTRUCTION WITH THE APPROPRIATE UTILITY COMPANY AND SHALL BE RESPONSIBLE FOR ANY DAMAGE TO UTILITIES. THE LANDSCAPE CONTRACTOR SHALL VERIFY THE EXACT LOCATION OF ALL UTILITIES AND TAKE PRECAUTIONS TO PREVENT DAMAGE TO THE UTILITIES.
- 2) ALL PLANTING AND MULCH BEDS SHALL BE SPRAYED WITH ROUND-UP (CONTRACTOR'S OPTION) PRIOR TO THE INSTALLATION OF MULCH.
- 3) PLANT MATERIALS AND STUMPS INDICATED FOR REMOVAL SHALL BE REMOVED AND DISPOSED OF OFF SITE BY THE CONTRACTOR. BAGWALL HOLES WITH TOPSOIL, FREE OF ROOTS AND ROCKS.
- 4) THE LANDSCAPE CONTRACTOR SHALL BE RESPONSIBLE FOR THE FINE GRADING OF ALL PLANTING AREAS.
- 5) ALL PLANTING AREAS SHALL BE FERTILIZED WITH 12#-1000 5-0-10 10-10-10 FERTILIZER.
- 6) ALL PLANTING BEDS SHALL HAVE A MINIMUM OF 3" DEPTH OF SHREDED HARDWOOD BARK MULCH.
- 7) THE LANDSCAPE CONTRACTOR SHALL VERIFY ALL MATERIAL QUANTITIES. IN THE EVENT OF A DISCREPANCY, THE QUANTITIES SHOWN ON THE PLAN WILL TAKE PRECEDENCE.
- 8) THE LANDSCAPE CONTRACTOR SHALL PROVIDE THE OWNER WITH WRITTEN INSTRUCTIONS ON THE PROPER CARE OF ALL SPECIFIED PLANT MATERIALS PRIOR TO FINAL PAYMENT.
- 9) EXISTING TREES TO REMAIN SHALL BE PROTECTED FROM CONSTRUCTION DAMAGE. SELECTIVELY PRUNE DEAD WOOD.
- 10) ALL DISTURBED AREAS SHALL BE PLANTED WITH TURF AS INDICATED ON THE MATERIALS SCHEDULE.
- 11) ALL DECIDUOUS TREES, EXISTING AND PROPOSED SHALL BE PRUNED TO PROVIDE A MINIMUM CLEAR TRUNK UNLESS OTHERWISE NOTED.
- 12) THE LANDSCAPE CONTRACTOR SHALL PROVIDE A ONE YEAR WARRANTY ON ALL PLANT MATERIALS AND REPLACE ANY DEAD OR DYING MATERIAL WITHIN THAT TIME PERIOD.
- 13) NO PLANT MATERIALS SHOULD BE SUBSTITUTED WITHOUT AUTHORIZATION BY DALE & ASSOCIATES. PLANT SIZES SHOWN ARE MINIMUMS REQUIRED BY THE LOCAL MUNICIPALITY AND MATERIALS SHOWN HAVE BEEN SELECTED SPECIFICALLY FOR THIS PROJECT.
- 14) ALL WIRE BASKETS SHALL BE COMPLETELY REMOVED AND DISPOSED OF. BURLAP SHOULD BE REMOVED OR PUNCTURED IN AT LEAST 5 PLACES, REMOVE ALL TWINE FROM BURGLAPPED MATERIALS.
- 15) OUYING IS NOT ALLOWED UNLESS REQUIRED BY MUNICIPALITY OR SITE CONDITIONS. THE LANDSCAPE CONTRACTOR SHALL REMOVE WIRES AFTER A ONE YEAR PERIOD.
- 16) NO CANOPY TREE SHALL BE LOCATED WITHIN 15' OF AN OVERHEAD UTILITY. NO TREE SHALL BE LOCATED WITHIN A PUBLIC UTILITY EASEMENT. LOCATING PLANT MATERIALS WITHIN A DRAINAGE EXISTING IS ACCEPTABLE, BUT ONLY IF INSTALLED AS NOT TO DISTURB EXISTING DRAINAGE FLOW. IN SUCH INSTANCES, THE MATERIALS SHALL BE LOCATED NO CLOSER THAN 5' FROM THE CENTERLINE OF DRAINAGE.
- 17) LIGHTING PLAN TO BE COORDINATED WITH PROPOSED PLANTING PLAN. NO LIGHT POLES TO BE LOCATED IN TREE SPACES. SEE LIGHTING PLAN FOR PROPOSED LIGHT LOCATIONS.

STANDARD SP NOTES


- 1) THE PURPOSE OF THIS SP IS TO RECEIVE PRELIMINARY APPROVAL TO PERMIT THE DEVELOPMENT OF A 4 UNIT MULTIFAMILY RESIDENTIAL DEVELOPMENT AS SHOWN.
- 2) ANY EXCAVATION, FILL OR DISTURBANCE OF THE EXISTING GROUND ELEVATION MUST BE DONE IN ACCORDANCE WITH STORM WATER MANAGEMENT ORDINANCE NO. 78-840 & APPROVED BY THE METROPOLITAN DEPARTMENT OF WATER SERVICES.
- 3) THIS PROPERTY DOES NOT LIE WITHIN A FLOOD HAZARD AREA AS IDENTIFIED BY FEMA ON MAP 47060-0287, DATED APRIL 20, 2001.
- 4) ALL PUBLIC SIDEWALKS ARE TO BE CONSTRUCTED IN CONFORMANCE WITH METRO PUBLIC WORKS SIDEWALK DESIGN STANDARDS.
- 5) WHEEL CHAIR ACCESSIBLE CURB RAMP, COMPLYING WITH APPLICABLE METRO PUBLIC WORKS STANDARDS, SHALL BE CONSTRUCTED AT STREET CROSSINGS.
- 6) THE REQUIRED FIRE FLOW SHALL BE DETERMINED BY THE METROPOLITAN FIRE MARSHAL'S OFFICE, PRIOR TO THE ISSUANCE OF A BUILDING PERMIT.
- 7) SIZE DRAINWAY CULVERTS PER THE DESIGN CRITERIA SET FORTH BY THE METRO STORMWATER MANUAL, MINIMUM DRAINWAY CULVERT IN METRO RIGHT OF WAY IS 15" CMP.
- 8) METRO WATER SERVICES SHALL BE PROVIDED SUFFICIENT & UNENCUMBERED INGRESS & EGRESS AT ALL TIMES IN ORDER TO MAINTAIN, REPAIR, REPLACE & INSPECT ANY STORMWATER FACILITIES WITHIN THE PROPERTY.
- 9) INDIVIDUAL WATER AND/OR SANITARY SEWER SERVICE LINES ARE REQUIRED FOR EACH UNIT.
- 10) SOLID WASTE PICKUP TO BE PROVIDED BY INDIVIDUAL ROLL AWAY TRASH CANS AS SHOWN ON THIS PLAN.
- 11) THE DEVELOPMENT OF THIS PROJECT SHALL COMPLY WITH THE REQUIREMENTS OF THE ADOPTED TREE ORDINANCE 2008-238 (METRO CODE CHAPTER 17-24, ARTICLE X, TREE PROTECTION AND REPLACEMENT; AND CHAPTER 17-40, ARTICLE X, TREE PROTECTION AND REPLACEMENT PROCEDURES).
- 12) MINOR MODIFICATIONS TO THE PRELIMINARY SP PLAN MAY BE APPROVED BY THE PLANNING COMMISSION OR ITS DESIGNEE BASED UPON FINAL ARCHITECTURAL, ENGINEERING OR SITE DESIGN AND ACTUAL SITE CONDITIONS. ALL MODIFICATIONS SHALL BE CONSISTENT WITH THE PRINCIPLES AND FURTHER THE OBJECTIVES OF THE APPROVED PLAN. MODIFICATIONS SHALL NOT BE PERMITTED, EXCEPT THROUGH AN ORDINANCE APPROVED BY METRO COUNCIL, THAT INCREASE THE DENSITY OR FLOOR AREA, ADD USES NOT OTHERWISE PERMITTED, ELIMINATE SPECIFIC CONDITIONS OR REQUIREMENTS CONTAINED IN THE PLAN AS ADOPTED THROUGH THIS ENACTING ORDINANCE, OR ADD VEHICULAR ACCESS POINTS NOT CURRENTLY PRESENT OR APPROVED.
- 13) FOR ANY DEVELOPMENT STANDARDS, REGULATIONS AND REQUIREMENTS NOT SPECIFICALLY SHOWN ON THE SP PLAN AND/OR INCLUDED AS A CONDITION OF COMMISSION OR COUNCIL APPROVAL, THE PROPERTY SHALL BE SUBJECT TO THE STANDARDS, REGULATIONS AND REQUIREMENTS OF THE R18-5A ZONING DISTRICT AS OF THE DATE OF THE APPLICABLE REQUEST OR APPLICATION.
- 14) THIS DRAWING IS FOR ILLUSTRATION PURPOSES TO INDICATE THE BASIC PREMISE OF THE DEVELOPMENT. THE FINAL LOT COUNT AND DETAILS OF THE PLAN SHALL BE GOVERNED BY THE APPROPRIATE REGULATIONS AT THE TIME OF FINAL APPLICATION. R18-5A ZONING SHALL BE USED FOR ANY STANDARDS NOT SPECIFIED IN THIS SP.

GENERAL PLAN CONSISTENCY NOTE

THE SPECIFIC PLAN PROPOSED HEREIN IS LOCATED WITHIN SUBAREA #8 OR THE NORTH NASHVILLE COMMUNITY PLAN. THE SPECIFIED LAND USE IS NEIGHBORHOOD EVOLVING, TRAMSECT 4 (OR 14 NE). THE PRIMARY GOAL OF 14 NE IS TO CREATE AND ENHANCE URBAN NEIGHBORHOODS WITH HIGHER DENSITY WHILE PROVIDING HOUSING OPTIONS AND MAINTAINING THE EXISTING CHARACTER OF THE SURROUNDING AREA OR COMMUNITY.

AS PROPOSED, THIS SPECIFIC PLAN WILL PRESERVE AND RENOVATE THE EXISTING STRUCTURE, WHICH HAS MANY CHARACTERISTICS OF A NEIGHBORHOOD LANDMARK. ADDITIONALLY, ITS CONVERSION TO A MULTIFAMILY UNITS WILL PROVIDE APPROPRIATE INFILL DENSITY WHILE STILL MAINTAINING THE STRUCTURE'S ORIGINAL FACADE, CHARACTER AND VIEW-SHED FROM 98 AVENUE NORTH, LIMITING VEHICULAR ACCESS TO THE ALLEY, MAINTAINING AND IMPROVING THE PROPERTY'S STREETSCAPE, IMPROVING THE PROPERTY'S LANDSCAPE AND PROVIDING SUFFICIENT (BUT SCREENED) PARKING/SOLID WASTE COLLECTION ALL MEET THE GOALS AND OBJECTIVES OF THE NEIGHBORHOOD EVOLVING POLICY, WHILE INTRODUCING A VARIATION IN HOUSING TYPE/OPTIONS.

THE USE PROPOSED, AS WELL AS THE SITE'S DESIGN AND DENSITY ARE APPROPRIATE AS OUTLINED WITHIN THE 14 NE POLICY IN THE COMMUNITY CHARACTER MANUAL, AND THE PLAN WILL HELP TO PRESERVE A NEIGHBORHOOD STRUCTURE, RECOMMENDED BASE ZONINGS WITHIN THE 14 NE POLICY RANGE FROM R33.75 UP TO RM46, WHICH THE PROPOSAL PRESENTED HEREIN AT 15 UNITS/ACRE CERTAINLY FALLS WITHIN.

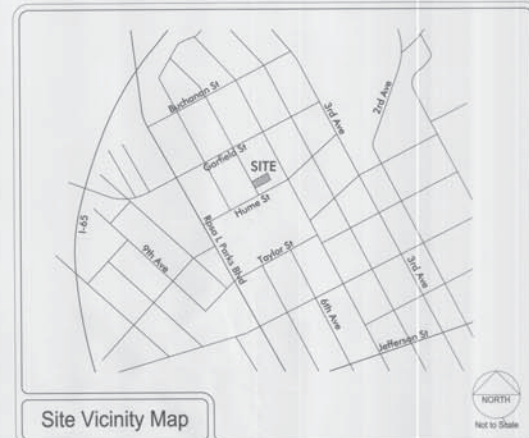

SPECIFIC PLAN DEVELOPMENT SUMMARY

USE	MULTIFAMILY
PROPERTY ZONING #8	SUBORDINATING ZONING #8
MINIMUM LOT SIZE	NOT APPLICABLE
NUMBER OF RESIDENTIAL UNITS/DENSITY	4 TOTAL UNITS (15 UNITS/AC)
FAR	0.80 MAXIMUM/ 70% PROPOSED
ISR	0.80 MAXIMUM/ 66% PROPOSED
STREET YARD SETBACK:	30'
SIDE YARD:	5'
REAR YARD	NOT APPLICABLE
HEIGHT STANDARDS	2 STORES MAXIMUM (ROOFTOP TERRACE ACCESS EXCLUDED)
PARKING AND ACCESS	
RAMP LOCATION AND NUMBER	UNIT ACCESS VIA 6TH AVE N AND ALLEY #300
DISTANCE TO NEAREST EXISTING RAMP (MINIMUM 30')	±100' NORTH ON 6TH AVE N
DISTANCE TO INTERSECTION	±120'
REQUIRED PARKING	6 REQUIRED
PARKING PROVIDED	8 STALLS / 2 ON STREET (SEE SUMMARY BELOW)

*NOTE: SPECIFIC ENCROACHMENTS PERMITTED BY SP (NOT TO ENCRACH INTO RIGHT OF WAY)

6 FT. - COVERED PORCHES
2 FT. - BAL. WINDOWS
4 FT. - STOOPS & BALCONIES

PARKING SUMMARY:

4 ONSTREET 8'5" X 18' 90" STALLS W/ 24" DRIVE AISLE (4 CODE COMPLIANT)
2 ONSTREET 8' X 23' PARALLEL STALLS (1 CODE COMPLIANT)
4 ONSTREET 8'5" X 15' 90" COMPACT STALLS W/ 24" DRIVE AISLE (2 COUNTED AS CODE COMPLIANT)
TOTAL PARKING PROVIDED: 10 STALLS
TOTAL CODE COMPLIANT PARKING: 7 STALLS

Revised and Issued: 8/27/14
AUG 28 2014
Metropolitan Planning Department

Sheet Schedule

- 1 C1.0 Notes & Project Standards
- 2 C2.0 Existing Conditions & Layout

Notes & Project Standards



REVISIONS:
MPC REVISIONS 8/27/14

Preparation Date: August 2014

1604 6th Ave N
Preliminary Specific Plan
Tax Map 82-09, Parcel 1
Nashville, Davidson County, Tennessee





Dale & Associates
Consulting Civil Engineering
Land Planning & Zoning
Surveying

MPC Case Number
2014SP-067-001

D&A Project No. 1500
1604 6th Ave N
Nashville, Tennessee 37204
(615) 297-5166

C0.0

1 of 2

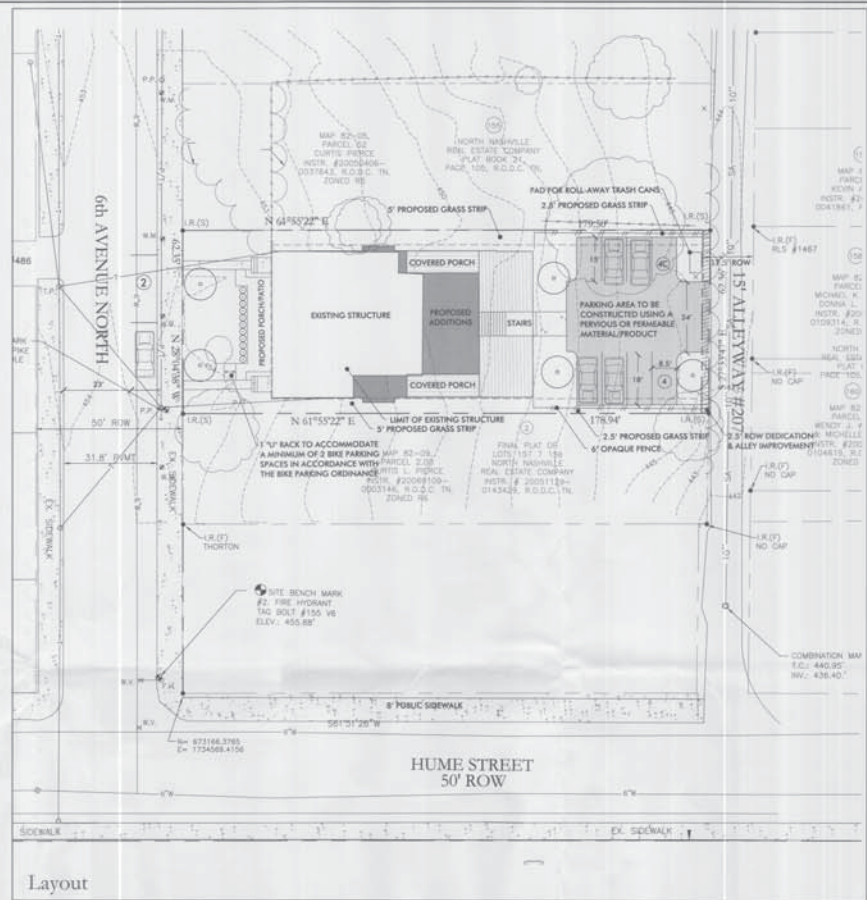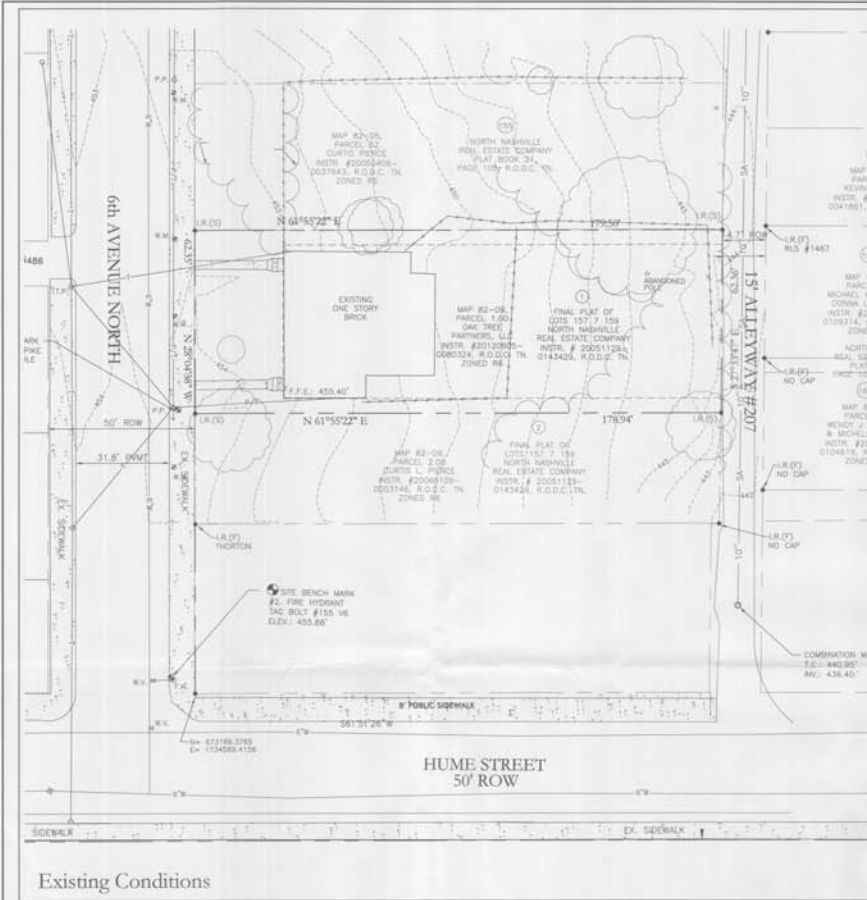

Existing Conditions

Layout

- Grading Permit Exemption Notes (Per SWMM, Volume 1, Section 3.4.3)**
1. Fill material contains only inert soil, rock, concrete without rebar and no more than 24 inches in length, and/or brick rubble.
 - SATISFIED
 2. Fill is not in the 100-year floodplain and is less than five (5) feet in vertical depth at its deepest point.
 - SATISFIED
 3. Does not result in a net quantity of more than 100 cy of material being removed from, deposited on, or disturbed on any lot, parcel or subdivision.
 - SATISFIED
 4. Does not impair existing surface storm water management systems, constitute a potential erosion hazard, or act as a source of sedimentation to any adjacent land or watercourse.
 - SATISFIED
 5. Has not fill placed on a surface have a slope steeper than 3:1 (Steeper slopes can be allowed if justified by calculations for appropriate stabilization measures).
 - SATISFIED
 6. Has no final slopes steeper than 3:1.
 - SATISFIED
 7. Has temporary or permanent soil stabilization measures applied to denuded areas within 15 days of disturbance.
 - SATISFIED
 8. Does not contain hazardous substances.
 - SATISFIED
 9. Is not partially or totally within a watershed with outlet to a sinkhole or drainage well.
 - SATISFIED
 10. Does not result in the exposure or disturbance of more than 10,000 square feet of land.
 - SATISFIED, 5,861 SF OF DISTURBANCE

TREE DENSITY NOTES

METRO TREE DENSITY REQUIREMENTS WILL BE ADDRESSED IN FINAL CONSTRUCTION DOCUMENTS. AT THE PRELIMINARY PHASE OF THIS PROJECT NO TREE INFORMATION IS AVAILABLE.

0.26 AC-0.10 AC = 0.16 AC x 14 = 2.2 TDU's REQ'D
 5 @ 0.5 (2" CAL TREE) = 2.5 TDU's PROP

NOTE: EXISTING TREES TO BE PRESERVED HAVE NOT BEEN INCLUDED IN THE REQUIRED TDU.

UTILITY NOTES

- 1) WATER AND SEWER SERVICE TO BE PROVIDED BY METRO WATER SERVICES.
- 2) WATER AND SEWER SERVICE TO BE OBTAINED USING EXISTING INFRASTRUCTURE AND PROVIDING ONLY ADDITIONAL WATER METERS AS NEEDED.
- 3) WATER AND SEWER SERVICE MAY BE PARTIALLY PROVIDED BY EXISTING, ONSITE METERS OR LATERALS IF DEEMED APPROPRIATE AT THE TIME OF THE PROJECT'S PERMITTING OR THROUGH THE FINAL SF PROCESS.



TOTAL AREA = 0.267 ACRES
 = 11,175.26 S.F.



REVISIONS:
 MPC REVISIONS 8/27/14

Preparation Date: August 2014

1604 6th Ave N
Preliminary Specific Plan
 Tax Map 82-09, Parcel 1
 Nashville, Davidson County, Tennessee



8/27/14

Dale & Associates
 Consulting Civil Engineering
 Land Planning & Zoning
 Surveying

DMA Project No 1308
 1604 6th Ave N
 (Parcel) 1P Drawings

C1.0

MPC Case Number
 2014SP-067-001

111 Heather Place
 Nashville, Tennessee 37204
 615.287.5566

2 of 2

Existing Conditions & Layout Plan

© 2014 Quirk
Nashville, TN



2801 BERRY HILL DRIVE
SUITE 200
NASHVILLE, TN 37204
PHONE: (615) 299-5288 FAX: (615) 827-1048
WWW.QUIRKDESIGNS.COM

QUIRK DESIGNS

PHONE:
615-299-5282
615-827-1048

Apartments
K. Clay Haynes
1604 6th Avenue North
Nashville, TN 37203

DATE: 8/25/14
REVISION

PROJECT NO: 14-045
COPYRIGHT 07/18/2014
QUIRK DESIGNS

3d

1
SHEET 8

© 2014 Quirk Designs
All Rights Reserved
www.quirkdesigns.com



2311 SERRY HILL DRIVE
SUITE 201 TN 37224
Phone: (615) 279-2626 Fax: (615) 827-1298
www.quirkdesigns.com

QUIRK DESIGNS

PHONE:
615-279-2626
615-827-1298

Apartments
K. Clay Haynes
1604 6th Avenue North
Nashville, TN 37203

DATE: 8/25/14
REVISION

PROJECT NO: 14-045
COPYRIGHT 07/18/2014
QUIRK DESIGNS

Layout

A8
SHEET 9