

EROSION CONTROL & GRADING NOTES

- 1) EXPOSE AS SMALL AN AREA OF SOIL AS POSSIBLE ON THE SITE FOR NO MORE THAN 15 DAYS. KEEP DUST WITHIN TOLERABLE LIMITS BY SPRINKLING OR OTHER ACCEPTABLE MEANS.
- 2) ALL CUT/FILL AREAS TO HAVE A MINIMUM OF 4" OF TOPSOIL. COVER AREAS EXPOSED WITH TOPSOIL SHALL RECEIVE 1000 LBS PER 1000 SQUARE FEET OF 10-10-7 FERTILIZER (LESS OTHER WISE SPECIFIED IN WHAT EVER SPECIFICATIONS). 3" HOURS OR MORE OF RAIN (UNTIL 31" RESIDUE SEED PER 1000 SQUARE FEET) AND A STRAW MULCH COVER OF 70%80% COVERAGE APPROXIMATELY 120 POUNDS FOR 1000 SQUARE FEET. LINES OTHERWISE NOTED WITH WRITTEN SPECIFICATIONS.
- 3) EROSION CONTROL BARRIERS IS CALLED OUT ON PLANS AND IS TO COMPLY WITH THE METROPOLITAN STORMWATER MANAGEMENT MANUAL, VOLUME FOUR, SECTION 703.4.
- 4) DISTURBED AREAS ARE TO BE GRADED TO DIMAS AS INDICATED IN THE PLANS TO SEDIMENT BARRIERS DURING AND UPON THE COMPLETION OF CONSTRUCTION.
- 5) THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE VERIFICATION AND THE LOCATION OF ANY EXISTING UTILITIES. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO PROVIDE ACCESS TO ALL EXISTING UTILITIES DURING CONSTRUCTION. NO DAMAGE DOES OCCUR TO ANY SUD INSTALLATION. FULL REPAIR WILL BE ACCOMPLISHED AS PER THE CURRENT SPECIFICATION COVERING SUCH WORK.
- 6) ANY ACCESS ROUTES TO THE SITE SHALL BE BASED WITH CRUSHED STONE, ASTM #10 STONE, 100 FEET LONG AND AT LEAST 4" THICK.
- 7) THE PLACING AND SPREADING OF ANY FILL MATERIAL IS TO BE STARTED AT THE LOWEST POINT AND SHOULD LIFT IN HORIZONTAL LAYERS OF 4" THICKNESS (OR AS DIRECTED BY THE SOILS INVESTIGATIVE REPORT). SAND FILL MATERIAL IS TO BE FREE OF SOIL, ROOTS, PRODS, SOBS, OR ANY OTHER DISCOMPOSABLE MATERIAL. SAND FILL IS TO BE COMPACTED TO A MINIMUM OF 95% STANDARD PROCTOR OR AS OTHERWISE SPECIFIED BY THE SOILS REPORT OR WRITTEN SPECIFICATIONS.
- 8) THE CONTRACTOR SHALL NOTIFY THE METRO DAVIDSON COUNTY DEPARTMENT OF PUBLIC WORKS CONSTRUCTION COMPLIANCE DIVISION, THREE DAYS PRIOR TO BEGINNING THE WORK.
- 9) THE CONTRACTOR SHALL LOCATE AND STAKE THE LAYOUT OF THE SITE IN THE FIELD FOR INSPECTION BY THE ENGINEER. THE CONTRACTOR SHALL CHECK THE GRADING AND FINAL DIMENSIONS ON THE GROUND, AND REPORT ANY DISCREPANCIES TO THE ENGINEER IMMEDIATELY FOR A DECISION.
- 10) SURPLUS EXCAVATION OF TOPSOIL SHALL BE PLACED ON THE SITE AS APPROVED BY THE OWNER FOR THE PURPOSE OF FUTURE LANDSCAPE USE.
- 11) THE CONTRACTOR SHALL FURNISH AND INSTALL ALL NECESSARY TEMPORARY WORKS FOR THE PROTECTION OF THE PUBLIC AND EMPLOYEES, INCLUDING WARNING SIGNS AND LIGHTS.
- 12) THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY DAMAGE DONE TO THE PREMISES OR ADJACENT PREMISES OR INJURIES TO THE PUBLIC DURING THE CONSTRUCTION CAUSED BY HIMSELF, HIS SUB-CONTRACTORS, OR THE CARELESSNESS OF ANY OF HIS EMPLOYEES.
- 13) ALL WORK IS TO BE COMPLETED WITH COMPLIANCE TO THE RULES AND REGULATIONS SET FORTH BY METRO WATER SERVICES. THE CONTRACTOR SHALL GIVE ALL NECESSARY NOTICE, OBTAIN ALL PERMITS, AND PAY FEES REQUIRED FOR THE COMPLETION OF HIS PORTION OF THE WORK. HE SHALL ALSO COMPLY WITH ALL CITY, COUNTY AND STATE LAWS AND ORDINANCE OR REGULATIONS RELATING TO PORTIONS OF WORK WHICH HE IS TO PERFORM.
- 14) ALL EROSION CONTROL MEASURES SHALL REMAIN IN PLACE UNTIL SITE IS STABILIZED & CONSTRUCTION IS COMPLETE.
- 15) CONTRACTOR SHALL PROVIDE AN AREA FOR CONCRETE WASH DOWN AND EQUIPMENT FUELING IN ACCORDANCE WITH METRO CHAPTER 12.13. LOCATION TO BE COORDINATED WITH THE NPDES DEPARTMENT DURING THE PRE-CONSTRUCTION MEETING.

PUBLIC WORKS NOTES

- 1) ALL WORK WITHIN THE PUBLIC RIGHT OF WAY REQUIRES AN EXCAVATION PERMIT FROM THE DEPARTMENT OF PUBLIC WORKS.
- 2) PROOF-HOLDING OF ALL STREET SUBGRADES IS REQUIRED IN THE PRESENCE OF THE PUBLIC WORKS INSPECTOR. INSPECTION OF THE BRIDGE COURSE IS REQUIRED PRIOR TO FINAL PAVING IN THE PRESENCE OF THE PUBLIC WORKS INSPECTOR. THESE REQUESTS ARE TO BE MADE 24 HOURS IN ADVANCE.
- 3) STOP SIGNS ARE TO BE 30 INCH BY 30 INCH.
- 4) STREET SIGNS TO HAVE 5/8 INCH WHITE LETTERS ON A NINE INCH GREEN ALUMINUM BLADE, HIGH REFLECTIVE.
- 5) ALL PAVEMENT MARKING ARE TO BE THERMOPLASTIC.
- 6) IF THE DEVELOPER'S FINAL CONSTRUCTION SHALL COMPLY WITH THE DESIGN REGULATIONS ESTABLISHED BY THE DEPARTMENT OF PUBLIC WORKS IN EFFECT AT THE TIME OF APPROVAL OF THE PRELIMINARY DEVELOPMENT PLAN OR FINAL DEVELOPMENT PLAN OR BUILDING PERMIT AS APPLICABLE. FINAL DESIGN MAY VARY BASED ON FIELD CONDITIONS.
- 7) COMPLY WITH THE MWP TRAFFIC ENGINEER.
- 8) SIDEWALK, STREETCAMS, AND GRASS STRIPS ARE TO BE PER THE MSCP.
- 9) PUBLIC SOLID WASTE AND RECYCLING TO BE PROVIDED VIA PROVIDED DUMPSTERS.
- 10) THE FINAL SITE PLANNING PERMIT SETS SHALL DEFINE THE REQUIRED PUBLIC SIDEWALKS, ANY REQUIRED GRASS STRIP OR FRONTAGE ZONE AND THE LOCATION OF ALL EXISTING AND PROPOSED VERTICAL OBSTRUCTIONS WITHIN THE REQUIRED SIDEWALK AND GRASS STRIP OR FRONTAGE ZONE, PRIOR TO THE ISSUANCE OF USE AND OCCUPANCY PERMITS. EXISTING VERTICAL OBSTRUCTIONS SHALL BE RELOCATED OUTSIDE OF THE REQUIRED SIDEWALK, VERTICAL OBSTRUCTIONS ARE ONLY PERMITTED WITHIN THE REQUIRED GRASS STRIP OR FRONTAGE ZONE.

WATER & SEWER NOTES

- 1) ALL WATER AND SEWER CONSTRUCTION SHALL BE IN ACCORDANCE WITH SPECIFICATIONS AND STANDARD DETAILS OF THE METRO WATER SERVICES.
- 2) THE CONTRACTOR IS RESPONSIBLE FOR REIMBURSING THE METRO WATER SERVICES THE COST OF INSPECTION.
- 3) THE CONTRACTOR IS TO PROVIDE AND MAINTAIN THE CONSTRUCTION IDENTIFICATION SIGN FOR PRELIMINARY DEVELOPMENT APPROVAL.
- 4) ALL CONNECTIONS TO EXISTING MAINHOLES SHALL BE BY CORING AND RESILIENT CONNECTOR METHOD. REDUCED PRESSURE BACKFLOW PREVENTION DEVICES (RPP) OR DUAL CHECK VALVE WILL BE REQUIRED ON ALL TEST AND FILL LINES (LAUNCH) NEEDED FOR WATER MAIN CONSTRUCTION AND MUST BE APPROVED BY THE METRO WATER SERVICES.
- 5) ALL WATER METERS SHALL BE A MINIMUM OF 24" NOT TO EXCEED A MAXIMUM OF 20" BELOW FINISHED GRADE.
- 6) PRESSURE REGULATING DEVICES WILL BE REQUIRED ON THE CUSTOMER SIDE OF THE METER WHEN PRESSURES EXCEED 150 PSI.
- 7) PRESSURE REGULATING DEVICES WILL BE REQUIRED ON THE STREET SIDE OF THE METER WHEN PRESSURES EXCEED 150 PSI.
- 8) PUBLIC WATER AND SEWER CONSTRUCTION MUST BE SUBMITTED AND APPROVED PRIOR TO FINAL SP APPROVAL. THESE APPROVED CONSTRUCTION PLANS MUST MATCH THE FINAL SP SITE PLAN. THE REQUIRED CAPACITY FEES MUST ALSO BE PAID PRIOR TO FINAL SITE PLANS APPROVAL.

LANDSCAPE NOTES

- 1) THE LANDSCAPE CONTRACTOR SHALL COORDINATE ALL CONSTRUCTION WITH THE APPROPRIATE UTILITY COMPANY AND SHALL BE RESPONSIBLE FOR AND DAMAGE TO UTILITIES. THE LANDSCAPE CONTRACTOR SHALL VERIFY THE EXACT LOCATION OF ALL UTILITIES AND TAKE PRECAUTIONS TO PREVENT DAMAGE TO THE UTILITIES.
- 2) ALL PLANTING AND MULCH BEDS SHALL BE SPRAKED WITH ROUNDUP (CONTRACTORS OPTION) PRIOR TO THE INSTALLATION OF MULCH.
- 3) PLANT MATERIALS AND STUMPS INDICATED FOR REMOVAL SHALL BE REMOVED AND DISPOSED OFF-SITE BY THE CONTRACTOR. BACKFILL HOLES WITH TOPSOIL, FREE OF ROOTS AND WOODS.
- 4) THE LANDSCAPE CONTRACTOR SHALL BE RESPONSIBLE FOR THE FINE GRADING OF ALL PLANTING AREAS.
- 5) ALL PLANTING AREAS SHALL BE FERTILIZED WITH 100000 LB. OF 10-10-10 FERTILIZER.
- 6) ALL PLANTING BEDS SHALL HAVE A MINIMUM OF 3" DEPTH OF SHREDDED HANDBOOK BARK MULCH.
- 7) THE LANDSCAPE CONTRACTOR SHALL VERIFY ALL MATERIAL QUANTITIES. IN THE EVENT OF A DISCREPANCY, THE QUANTITIES SHOWN ON THE PLAN WILL TAKE PRECEDENCE.
- 8) THE LANDSCAPE CONTRACTOR SHALL PROVIDE THE OWNER WITH WRITTEN INSTRUCTIONS ON THE PROPER CARE OF ALL SPECIFIED PLANT MATERIALS PRIOR TO FINAL PAVING.
- 9) EXISTING TREES TO REMAIN SHALL BE PROTECTED FROM CONSTRUCTION DAMAGE, SELECTIVELY PRUNE DEAD WOOD.
- 10) ALL DISTURBED AREAS SHALL BE PLANTED WITH TURF AS INDICATED ON THE MATERIALS SCHEDULE.
- 11) ALL OBLIVIOUS TREES, EXISTING AND PROPOSED SHALL BE PRUNED TO PROVIDE A MINIMUM CLEAR TRUNK UNLESS OTHERWISE NOTED.
- 12) THE LANDSCAPE CONTRACTOR SHALL PROVIDE A ONE YEAR WARRANTY ON ALL PLANT MATERIALS AND REPLACE ANY DEAD OR DYING MATERIAL WITHIN THAT TIME PERIOD.
- 13) NO PLANT MATERIALS SHOULD BE SUBSTITUTED WITHOUT AUTHORIZATION BY DALE & ASSOCIATES. PLANT IDEAS SHOWN ARE WORKINGS REQUIRED BY THE LOCAL JURISDICTION AND MATERIALS SHOWN HAVE BEEN SELECTED SPECIFICALLY FOR THIS PROJECT.
- 14) ALL WIRE HASKETS SHALL BE COMPLETELY REMOVED AND DEPOSED OF. RAIN AIR SHOULD BE REMOVED OR PUNCTURED AT LEAST 3 PLACES. REMOVE ALL WIRE FROM BURIED MATERIALS.
- 15) CULMING IS NOT ALLOWED UNLESS REQUIRED BY MUNICIPALITY ON SITE CONDITIONS. THE LANDSCAPE CONTRACTOR SHALL REMOVE WIRES AFTER A ONE YEAR PERIOD.
- 16) NO CANOPY TREE SHALL BE LOCATED WITHIN 10' OF AN OVERHEAD UTILITY. NO TREE SHALL BE LOCATED WITHIN A PUBLIC UTILITY EASEMENT. LOCATING PLANT MATERIALS WITHIN A DRAINAGE FLOW, IN SUCH INSTANCES, THE MATERIALS SHALL BE LOCATED NO CLOSER THAN 5' FROM THE CENTRELINE OF DRAINAGE.
- 17) LIGHTING PLAN IS TO BE COORDINATED WITH PROPOSED PLANTING PLAN. NO LIGHT POLES TO BE LOCATED IN TREE ISLANDS. SEE LIGHTING PLAN FOR PROPOSED LIGHT LOCATIONS.

TRAFFIC AND PARKING

1. An access study is required prior to final SP.
2. A minimum provide parking per Metro Code.
3. Upon Final SP (Building Plan Approval). Provide adequate space for trucks to back into storage loading space near access doors and elevators. Identify truck size that will use storage facility and identify truck loading and unloading space for truck access and egress.
4. Identify on site loading area for retail activity per the requirements of Metro Codes and the Metro Zoning Ordinance.

FIRE MARSHALL

FIRE FLOW SHALL MEET THE REQUIREMENTS OF THE INTERNATIONAL FIRE CODE, 2009 EDITION

Stormwater Notes

1. This site is responsible for water quality and water quantity.
2. To provide the full water quality treatment per the Standards of Volume 5 of the Metro Nashville Stormwater Regulations. Design of these LED basins will be provided during the final SP process.
3. Storm sewer system on this plan is shown schematically. Final design will be provided during the final SP process and will meet the requirements of the stormwater management manual.
4. This project will disturb less than 1 acre, therefore, a NOI will not be submitted to TDEC during final SP process.
5. This drawing is for illustration purposes to indicate the basic premise of the development. The final lot count and details of the plan shall be governed by the appropriate regulations at the time of final application.


STANDARD SP NOTES

- 1) THE PURPOSE OF THIS SP IS TO PERMIT THE CONSTRUCTION OF 4,300 SF OFFICE/RETAIL SPACE AND 20,000 SF OF SELF STORAGE.
- 2) ANY EXCAVATION, FILL OR DISTURBANCE OF THE EXISTING GROUND ELEVATION MUST BE DONE IN ACCORDANCE WITH STORM WATER MANAGEMENT ORDINANCE NO. 78-840 AS APPROVED BY THE METROPOLITAN DEPARTMENT OF PUBLIC SERVICES.
- 3) THIS PROPERTY DOES NOT LIE WITHIN A FLOOD HAZARD AREA AS IDENTIFIED BY FEMA MAP 4703/C0229P DATED NOVEMBER 22, 2015.
- 4) ALL PUBLIC SIDEWALKS ARE TO BE CONSTRUCTED IN CONFORMANCE WITH METRO PUBLIC WORKS SIDEWALK DESIGN STANDARDS.
- 5) WHEEL CHAIR ACCESSIBLE CURB RAMP, COMPLYING WITH APPLICABLE METRO PUBLIC WORKS STANDARDS, SHALL BE CONSTRUCTED AT STREET CROSSINGS.
- 6) THE REQUIRED FIRE FLOW SHALL BE DETERMINED BY THE METROPOLITAN FIRE MARSHAL'S OFFICE, PRIOR TO THE ISSUANCE OF A BUILDING PERMIT.
- 7) SIZE DRIVEWAY CULVERTS PER THE DESIGN CRITERIA SET FORTH BY THE METRO STORMWATER MANUAL. MINIMUM DRIVEWAY CULVERT METRO RIGHT OF WAY IS 12' 0" DEEPS.
- 8) METRO WATER SERVICES SHALL BE PROVIDED SUFFICIENT & UNENCLUMBERED INGRESSES & EGRESSES AT ALL TIMES IN ORDER TO MAINTAIN, REPAIR, REPLACE & INSPECT ANY STORMWATER FACILITIES WITHIN THE PROPERTY.
- 9) INDIVIDUAL WATER AND/OR SANITARY SEWER SERVICE LINES ARE REQUIRED FOR EACH UNIT.
- 10) SOLID WASTE PICKUP PRIVATE DUMPSTER PICKUP.
- 11) MINOR MODIFICATIONS TO THE PRELIMINARY SP PLAN MAY BE APPROVED BY THE PLANNING COMMISSION OR ITS DESIGNEE BASED UPON FINAL ARCHITECTURAL, ENGINEERING OR SITE DESIGN AND ACTUAL SITE CONDITIONS. ALL MODIFICATIONS SHALL BE CONSISTENT WITH THE PRINCIPLES AND FURTHER THE OBJECTIVES OF THE APPROVED PLAN. MODIFICATIONS SHALL NOT BE PERMITTED EXCEPT THROUGH AN ORDINANCE APPROVED BY THE CITY COUNCIL. THIS INCLUDES THE PERMITTED DENSITY OR FLOOR AREA, AND USES NOT OTHERWISE PERMITTED, CLIMATE SPECIFIC CONDITIONS OR REQUIREMENTS CONTAINED IN THE PLAN AS ADOPTED THROUGH THE CHARTERS ORDINANCES, OR AS VEHICULAR ACCESS PORTIONS CURRENTLY PRESENT OR APPROVED.
- 12) FOR ANY DEVELOPMENT STANDARDS, REGULATIONS AND REQUIREMENTS NOT SPECIFICALLY SHOWN ON THE PLAN AND/OR PROVIDED AS A CONDITION OF COMMISSION OR COUNCIL APPROVAL, THE PROPERTY SHALL BE SUBJECT TO THE STANDARDS, REGULATIONS AND REQUIREMENTS OF THE LOCAL ZONING DISTRICT AS OF THE DATE OF THE APPLICABLE REGS OR APPROVAL.
- 13) THE FINAL SITE PLANNING PERMIT SETS SHALL DEFINE THE REQUIRED PUBLIC SIDEWALKS, ANY GRASS STRIP OR FRONTAGE ZONE AND THE LOCATION OF ALL EXISTING AND PROPOSED VERTICAL OBSTRUCTIONS WITHIN THE REQUIRED SIDEWALK AND GRASS STRIP OR FRONTAGE ZONE, PRIOR TO THE ISSUANCE OF USE AND OCCUPANCY PERMITS. EXISTING VERTICAL OBSTRUCTIONS SHALL BE RELOCATED OUTSIDE OF THE REQUIRED SIDEWALK, VERTICAL OBSTRUCTIONS ARE ONLY PERMITTED WITHIN THE REQUIRED GRASS STRIP OR FRONTAGE ZONE.
- 14) ALL DEVELOPMENT WITHIN THE BOUNDARIES OF THIS PLAN MEETS THE REQUIREMENTS OF THE AMERICANS WITH DISABILITIES ACT AND THE FAIR HOUSING ACT AND THE FAIR HOUSING ACT, ADA, "regulations"

GENERAL PLAN CONSISTENCY NOTE

THE SPECIFIC PLAN PROPOSED HEREIN IS LOCATED WITHIN THE WEST NASHVILLE COMMUNITY. THE SPECIFIED LAND USE POLICY FOR THIS SITE IS TRANSECT 4 (T4) URBAN MIXED USE (OR T4 CM). THERE IS A SPECIAL POLICY FOR THIS AREA SP D7-F4-CMGD THE PRIMARY GOAL OF THIS SPECIAL POLICY IS TO ALLOW AVOID ORIENTED AND LIGHT INDUSTRIAL USES IN A DESIGN BASED FORM THAT ENCOURAGES WALKABILITY AND BUILDING FACADES TO THE BACK EDGE OF THE SIDEWALK, WITH MAXIMUM BUILDING HEIGHTS OF 4 STORIES.

AS PROPOSED, THIS SPECIFIC PLAN WILL MEET THE CONDITIONS OF THE SPECIAL POLICY WHILE PROVIDING MUCH NEEDED PERSONAL STORAGE SPACE FOR RESIDENTS HOUSED IN NEARBY MID AND HIGH RISE BUILDINGS WITH LITTLE INTERIOR STORAGE. THE ADDITION OF STREET LEVEL RETAIL/OFFICE WILL MEET THE DESIRED FOR MIXED USES.

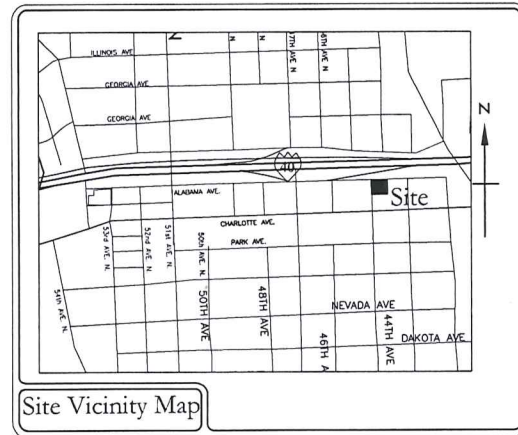

Site Vicinity Map

SPECIFIC PLAN DEVELOPMENT SUMMARY	
USE	SELF STORAGE, RETAIL/OFFICE
PROPERTY ZONING	CS SURROUNDING ZONING CS
TOTAL PROPERTY SIZE	0.706 ACRES (30750 sq)
OFFICE/RETAIL SPACE	5,900 SF
SELF STORAGE SPACE	85,100 SF
FAR	3.0
JOB	0.9
STREET YARD SETBACK:	0' MEASURED FROM RIGHT OF WAY
SIDE YARD	20' FROM EAST PROPERTY LINE
REAR YARD	20' MEASURED FROM ALLEY RIGHT OF WAY
HEIGHT STANDARDS	4 STORIES MAX. 145' Ht. Alabama Frontage to appear as 3 stories
PARKING AND ACCESS	
RAMP LOCATION AND NUMBER	ACCESS FROM EXISTING ALLEY
REQUIRED PARKING	24 SPACES
2000 SF OF RETAIL EXEMPT FROM PARKING REQUIREMENTS, 3900 SF OFFICE/RETAIL REQUIRES 20 SPACES	
SELF STORAGE REQUIRES 4 SPACES	
PARKING PROPOSED	28 PARKING SPACES

ORDINANCE NO. BL2016-220

Property Information
 4305 and 4308 Alabama Ave
 Nashville, Tennessee
 0.706 Acres
 Council District 24 (Kathleen Murphy)

Owner
 Dorris Calvin (Option Rental)
 4307 Alabama Ave
 Nashville, TN 37209

P 601.467.8300
 ctippens@gmail.com

Developer
 Casey Tippetts
 Spacebox Storage
 49A Watercolor Way
 Santa Rosa Beach, FL 32459

P 601.467.8300
 ctippens@gmail.com

Civil Engineer
 Dale & Associates
 516 Heather Place
 Nashville, Tennessee 37204
 Contact: Roy M. Dale, PE
 Phone: 615.297.5166
 Email: roy@daleandassociates.net



Dale & Associates
 Consulting Civil Engineering
 Land Planning & Zoning
 Surveying

MPC Case Number
 2016SP-082-001




D&A Project #1064
 4305 & 4307 Alabama Ave SP

C1.0
 Sheet 1 of 3

Project to be Completed In One Phase

Notes & Project Standards

516 Heather Place
 Nashville, Tennessee 37204
 (615) 297-5166

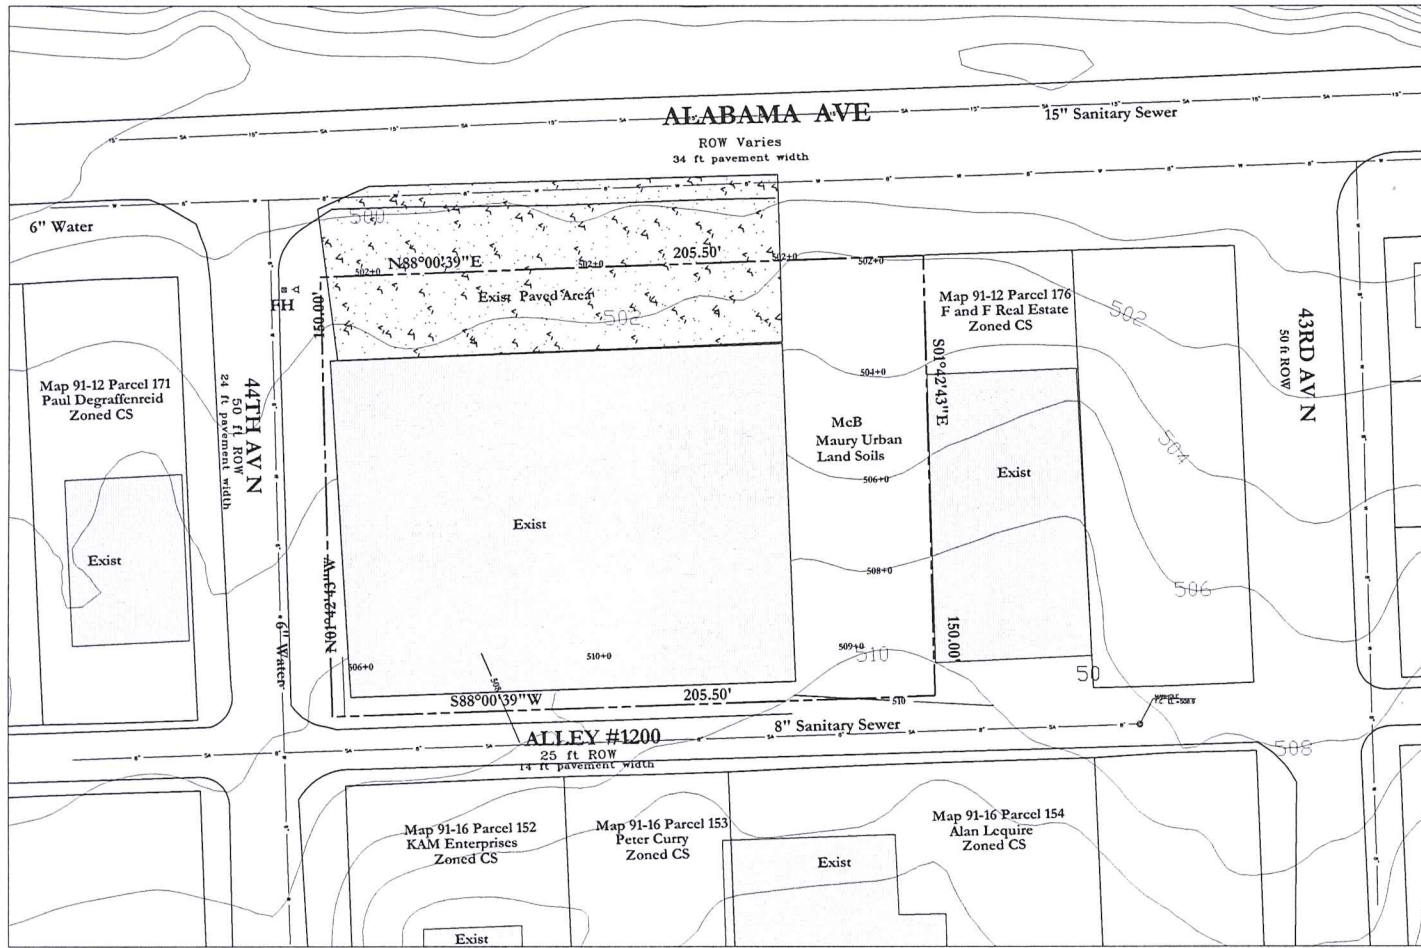

REVISIONS
Rev 12/4/16

4305 and 4307 Alabama Avenue
 Preliminary Specific Plan
 Map 91-12 & Parcels 174 and 175
 Nashville, Davidson County, Tennessee





Dale & Associates
 Consulting Civil Engineering
 Land Planning & Zoning
 Landscape Architecture

MPC Case Number 2016SP-082-001
D&A Project #16164 4305 & 4307 Alabama Ave SP
C2.0
Sheet 2 of 3

Existing Conditions

516 Heather Place
 Nashville, Tennessee 37204
 (615) 297-5166

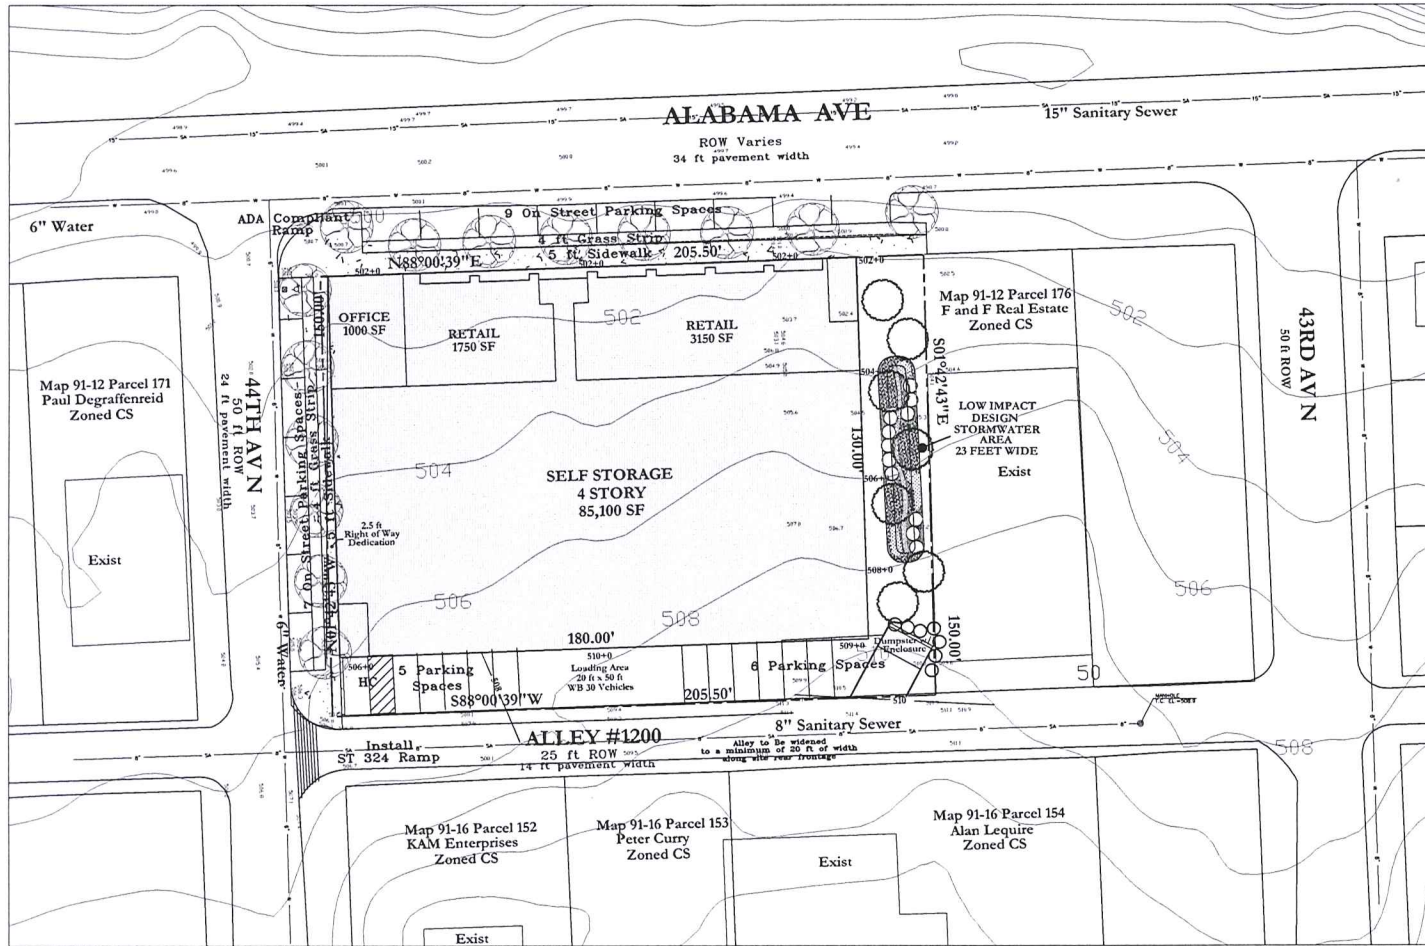


REVISIONS	
Rev	12/4/16


4305 and 4307 Alabama Avenue
 Preliminary Specific Plan
 Map 91-12 & Parcels 174 and 175
 Nashville, Davidson County, Tennessee

Stormwater Notes

1. This site is responsible for water quality and water quantity.
2. To provide the full water quality treatment per the Standards of Volume 5 of the Metro Nashville Stormwater Regulations, Design of these LD features will be provided during the final SP process.
3. Storm sewer system on this plan is shown schematically. Final design will be provided during the final SP process and will meet the requirements of the stormwater management manual.
4. This project will disturb less than 1 acre, therefore, a NOI will not be submitted to TDEC during final SP process.
5. This drawing is for illustration purposes to indicate the basic premise of the development. The final lot count and details of the plan shall be governed by the appropriate regulators at the time of final application.



SP Layout



Dale & Associates
 Consulting Civil Engineering
 Land Planning & Zoning
 Landscape Architecture

MPC Case Number
2016SP-082-091
 DWA Project #7654
 4305 & 4307 Alabama Ave SP
C3.0
 Sheet 3 of 3

516 Heather Place
 Nashville, Tennessee 37204
 (615) 297-5106